



SWADLING

BRASSWARE


INSTALLATION INSTRUCTIONS

Illustrious Triple controlled outlet
concealed valve

U90310000

Handles Suffix : XH1 Cross LV1 Lever

Disc Suffix	XH3 Mother of Pearl
XH0 White Glass	XH6 Black Lip Pearl
XH2 Plain Brass	XH9 Black Glass

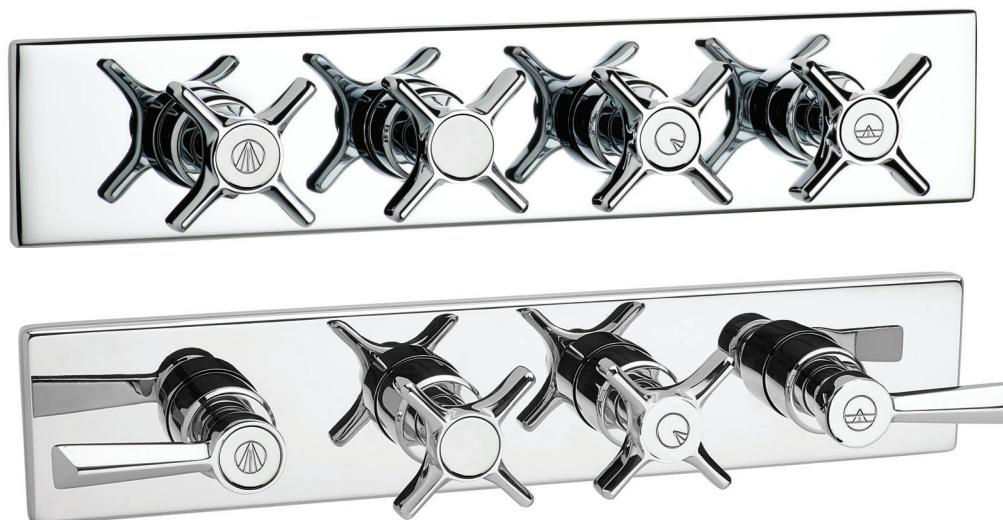

IMPORTANT INSTALLATION INFORMATION

- Before Installation, please check all parts against the parts list on the back page of this booklet.
- Make sure that the parts are undamaged and that their finish is as expected.
- Should you find a faulty or damaged part, please be in touch with our Customer Services Team immediately using the contact details below.
- Any claim for faulty or damaged parts will require the affected part to be returned to Swadling Brassware for inspection and testing.
- No claim for damaged parts or issues with a product finish will be accepted after the product has been installed.


Swadling Brassware, Churchward Road, Yate, Bristol, BS37 5PL, UNITED KINGDOM

Telephone: 332 3730648


Email: helpline@swadlingbrassware.com

www.swadlingbrassware.com


PREPARATION

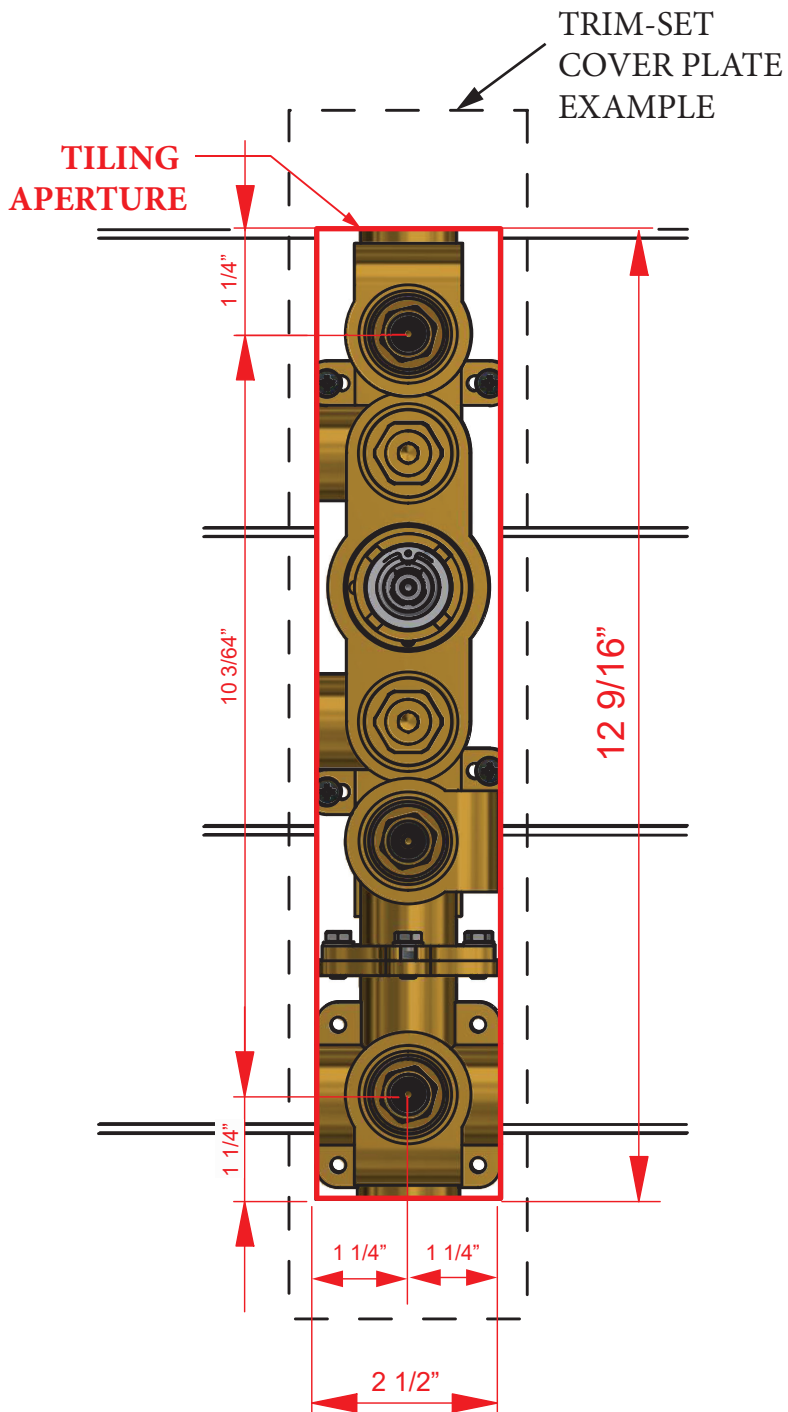

MIN 3 5/32" - MAX 4 1/8"

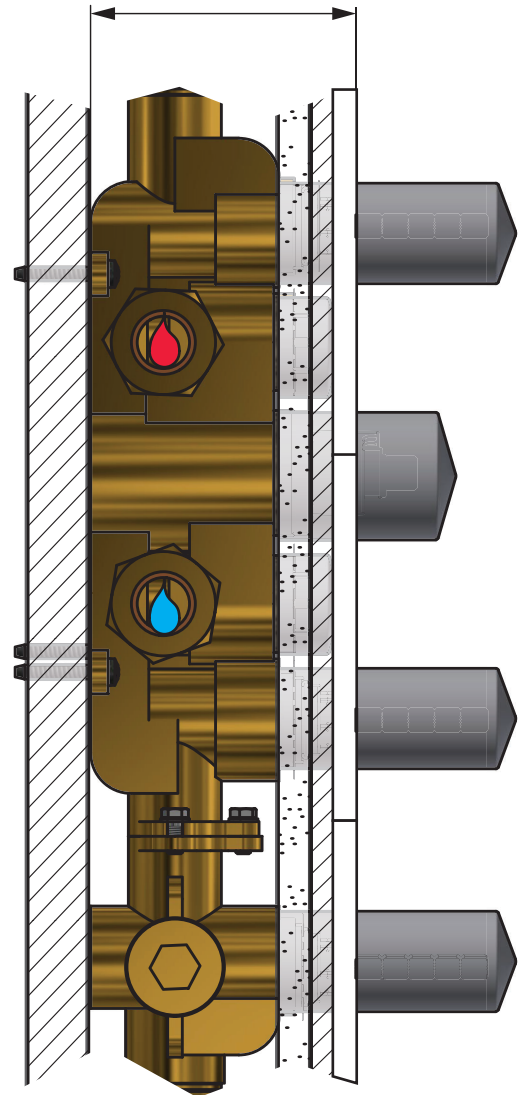

SETTING THE TEMPERATURE

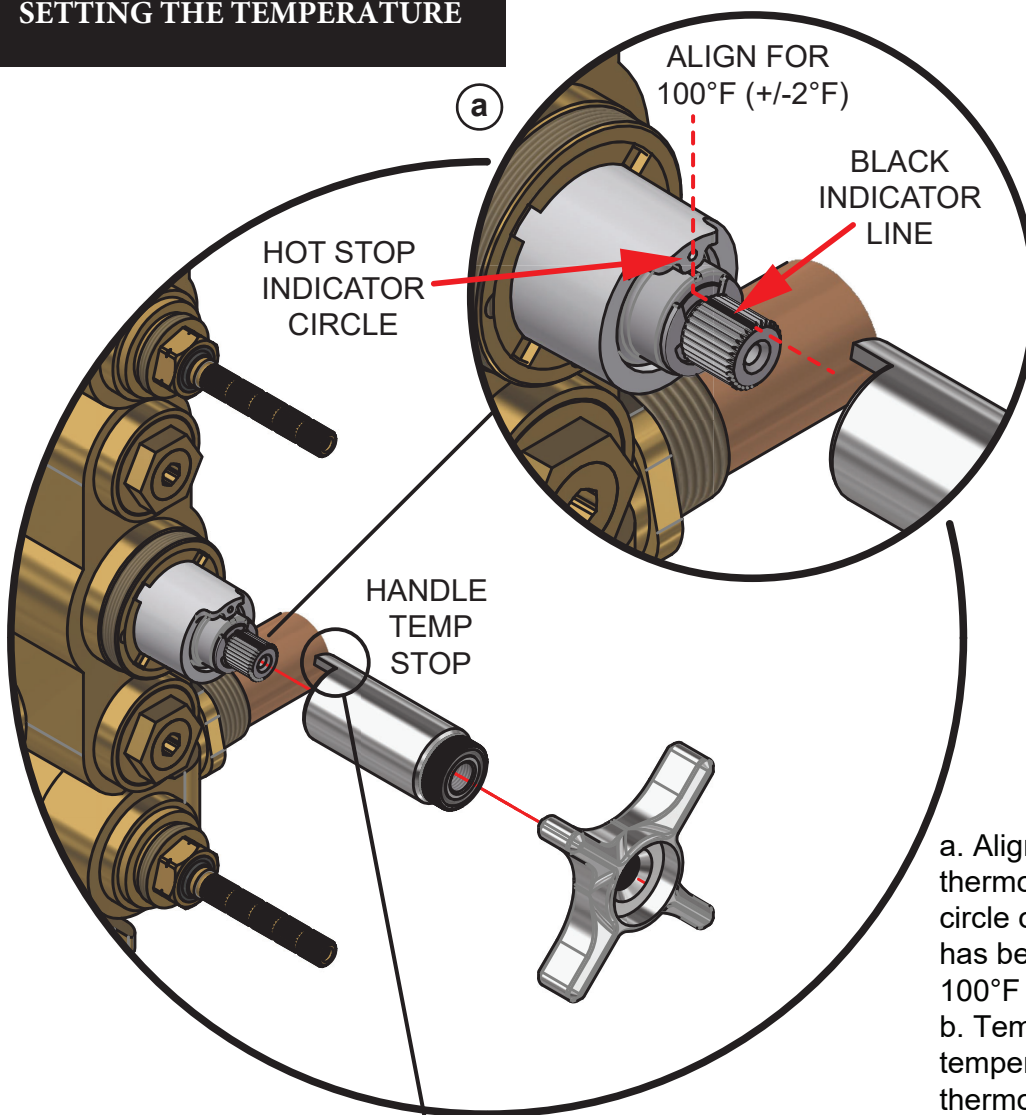

a. Align the black indicator line on the thermostatic spindle with the indicator circle on the cartridge housing. This has been factory set to achieve 100°F (+/-2°F) water temperature.


b. Temporarily assemble the temperature handle to the thermostatic cartridge making sure the handle temperature stop is against the right hand side of the thermostatic hot stop, this will be your maximum outlet temperature.

To increase the maximum outlet temperature - remove the handle assembly and re-position the handle temperature stop, rotated towards the clockwise direction by a few degrees, re-fit handle and turn back to stop position, re-test with a thermometer.

For SAFETY REASONS the maximum temperature should not exceed 105.8°F.



To decrease maximum temperature, using the handle, rotate temperature spline clockwise by a few degrees, remove the handle assembly and re-fit ensuring the handle temperature stop is against the right hand side of the thermostatic hot stop, re-test.

Remove handle assembly ensuring it is set in the hot stop position. Set aside handle assembly ready to assemble sleeve and plate.

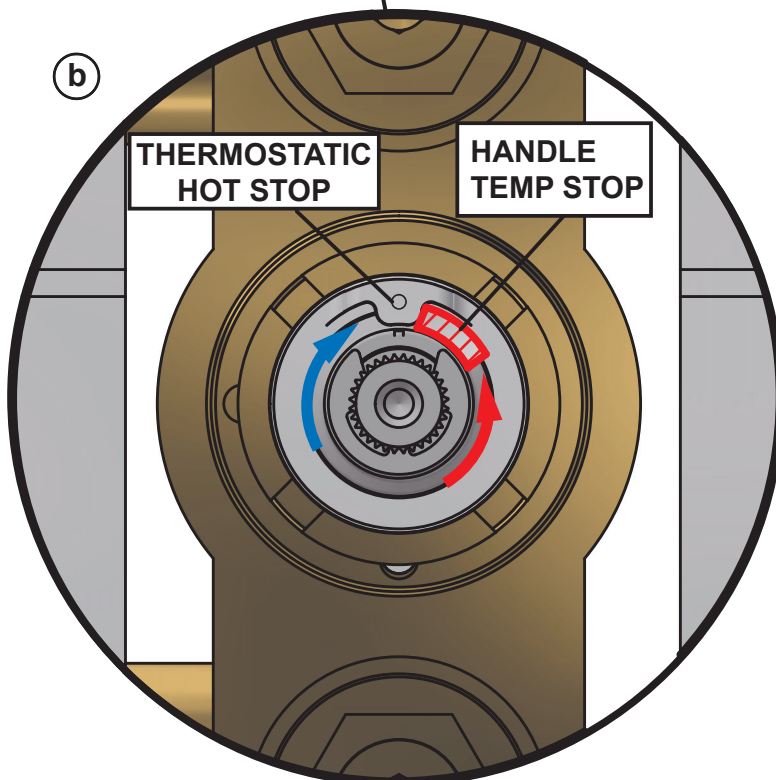


INSTALLATION

COLLAR ENGRAVING ONLY APPLIES ON MODELS WITH MOTHER OF PEARL, BLACK LIP PEARL OR BRASS HANDLE DISCS. OTHERWISE COLLARS ARE PLAIN

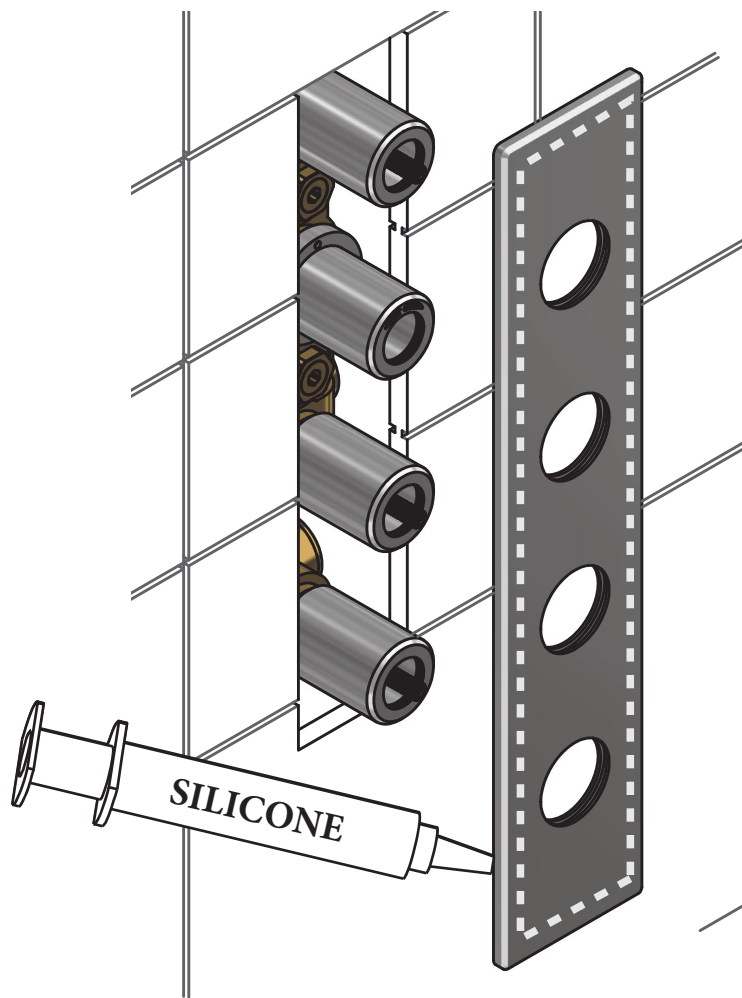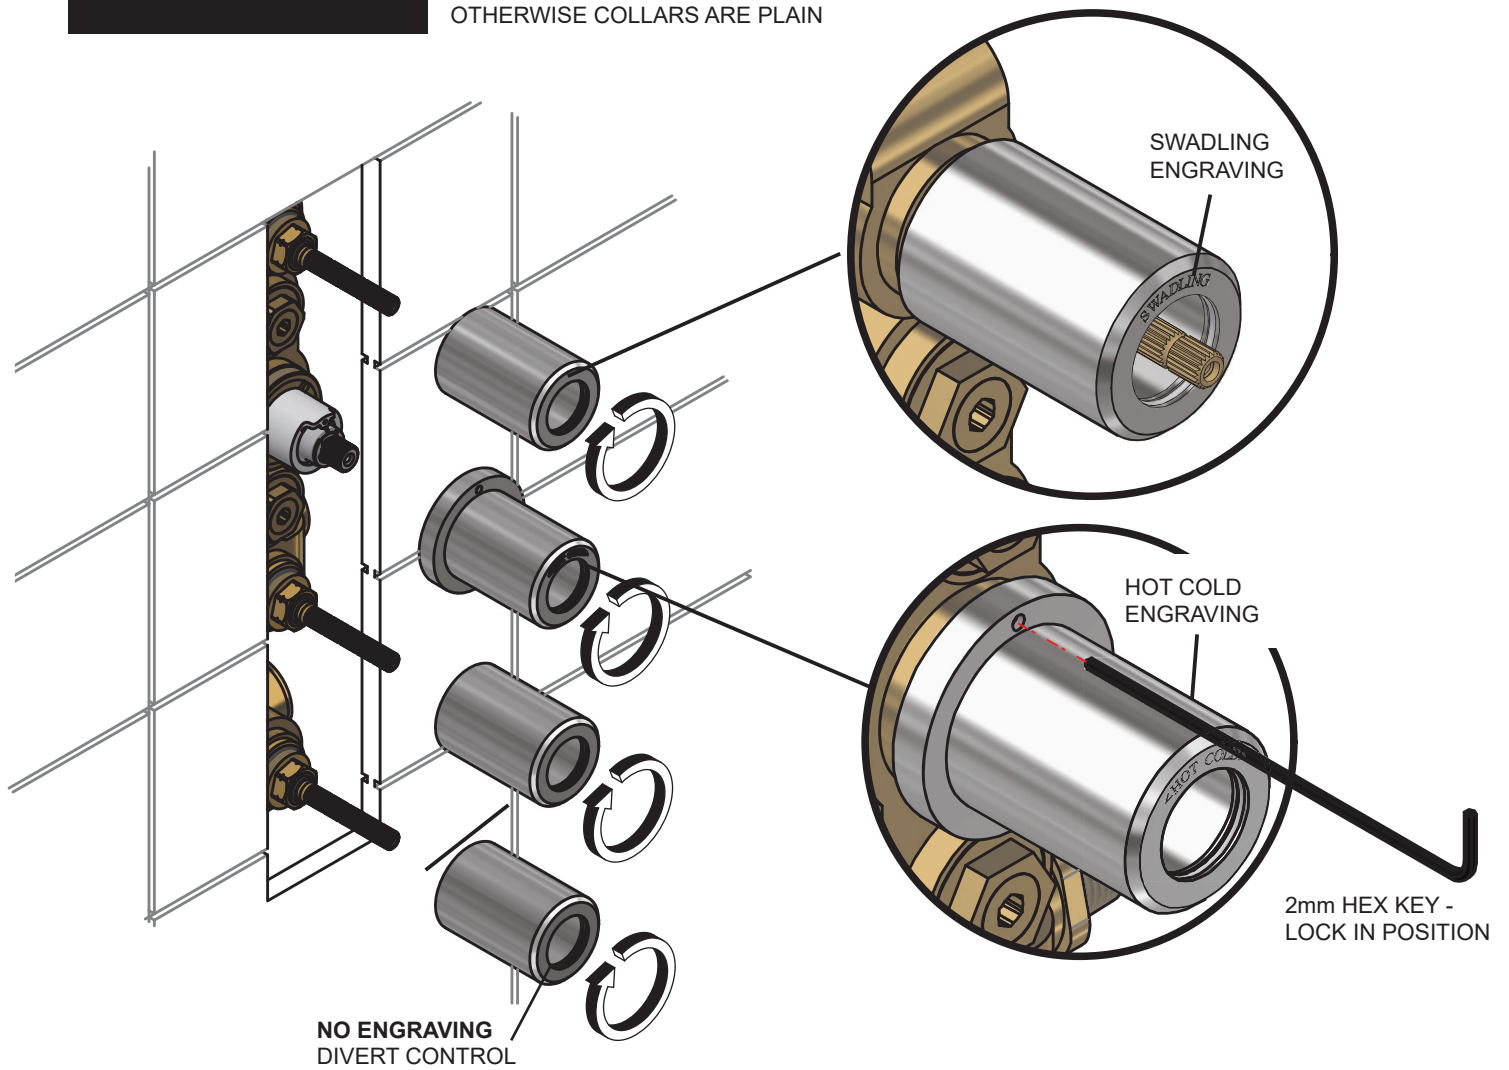

HANDLES

MODEL SHOWN IS U9031000XH
CONTROL HANDLES VARY DEPENDING ON MODEL.
SEE 'HANDLE CONFIGURATION' PAGE FOR CORRECT HANDLE POSITIONING

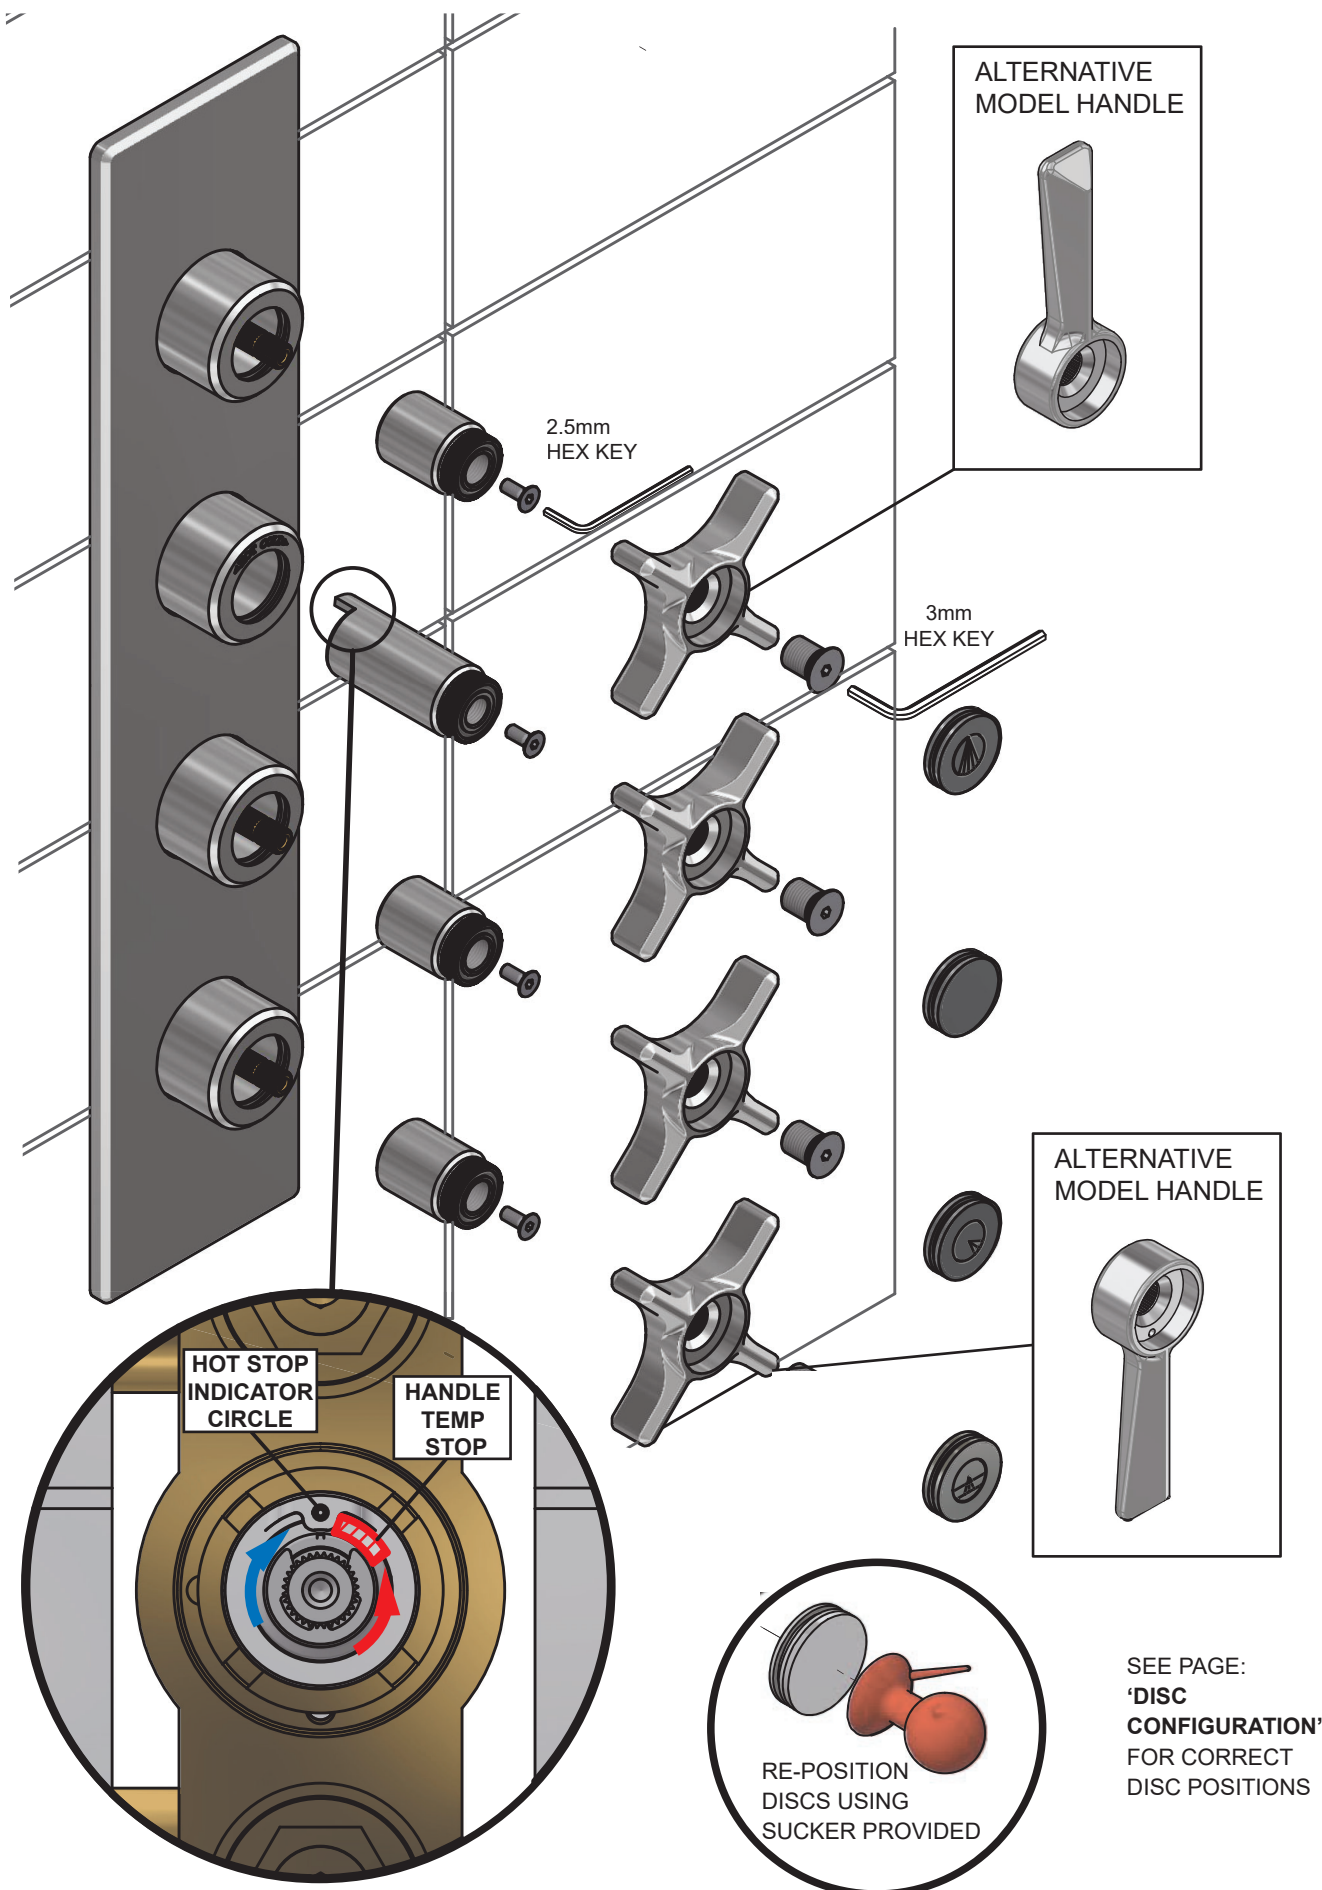

HANDLE
CONFIGURATION




U9031000XH



U9031000LV


**DISC
CONFIGURATION**

**ALTERNATIVE
HOT COLD
MODELS**




HOT COLD INSERT	
COLOUR	PART No.
MOTHER OF PEARL*	SB0015
BLACK LIP PEARL*	SB0018
WHITE DISC*	SB0002
BLACK DISC*	SB0006
PLAIN BRASS	SB0450



**ALTERNATIVE
BATH
MODELS**



SHOWER INSERT	
COLOUR	PART No.
MOTHER OF PEARL*	SB0015
BLACK LIP PEARL*	SB0018
WHITE DISC*	SB0003
BLACK DISC*	SB0007
PLAIN BRASS	SB0450
ART DECO BATH	SB0460


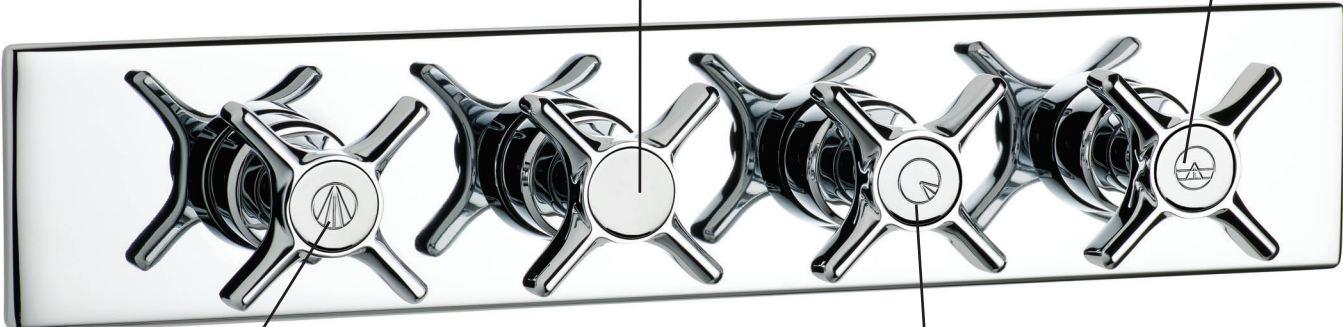


**ALTERNATIVE
DELUGE
MODELS**



DELUGE INSERT	
COLOUR	PART No.
MOTHER OF PEARL*	SB0015
BLACK LIP PEARL*	SB0018
WHITE DISC*	SB0004
BLACK DISC*	SB0008
PLAIN BRASS	SB0450
ART DECO DELUGE	SB0458

**ALTERNATIVE
SHOWER
MODELS**




SHOWER INSERT	
COLOUR	PART No.
MOTHER OF PEARL*	SB0015
BLACK LIP PEARL*	SB0018
WHITE DISC*	SB0001
BLACK DISC*	SB0005
PLAIN BRASS	SB0450
ART DECO SHOWER	SB0459

PARTS LIST

MODEL SHOWN IS U9031000XH
CONTROL HANDLES VARY ON ALTERNATIVE MODELS.
SEE 'HANDLE CONFIGURATION' FOR HANDLE PLACEMENT

*COLLAR ENGRAVING ONLY
APPLIES ON MODELS WITH
MOTHER OF PEARL, BLACK LIP
PEARL OR BRASS HANDLE DISCS.
OTHERWISE COLLARS ARE PLAIN

ALTERNATIVE
MODEL HANDLE
SB0756

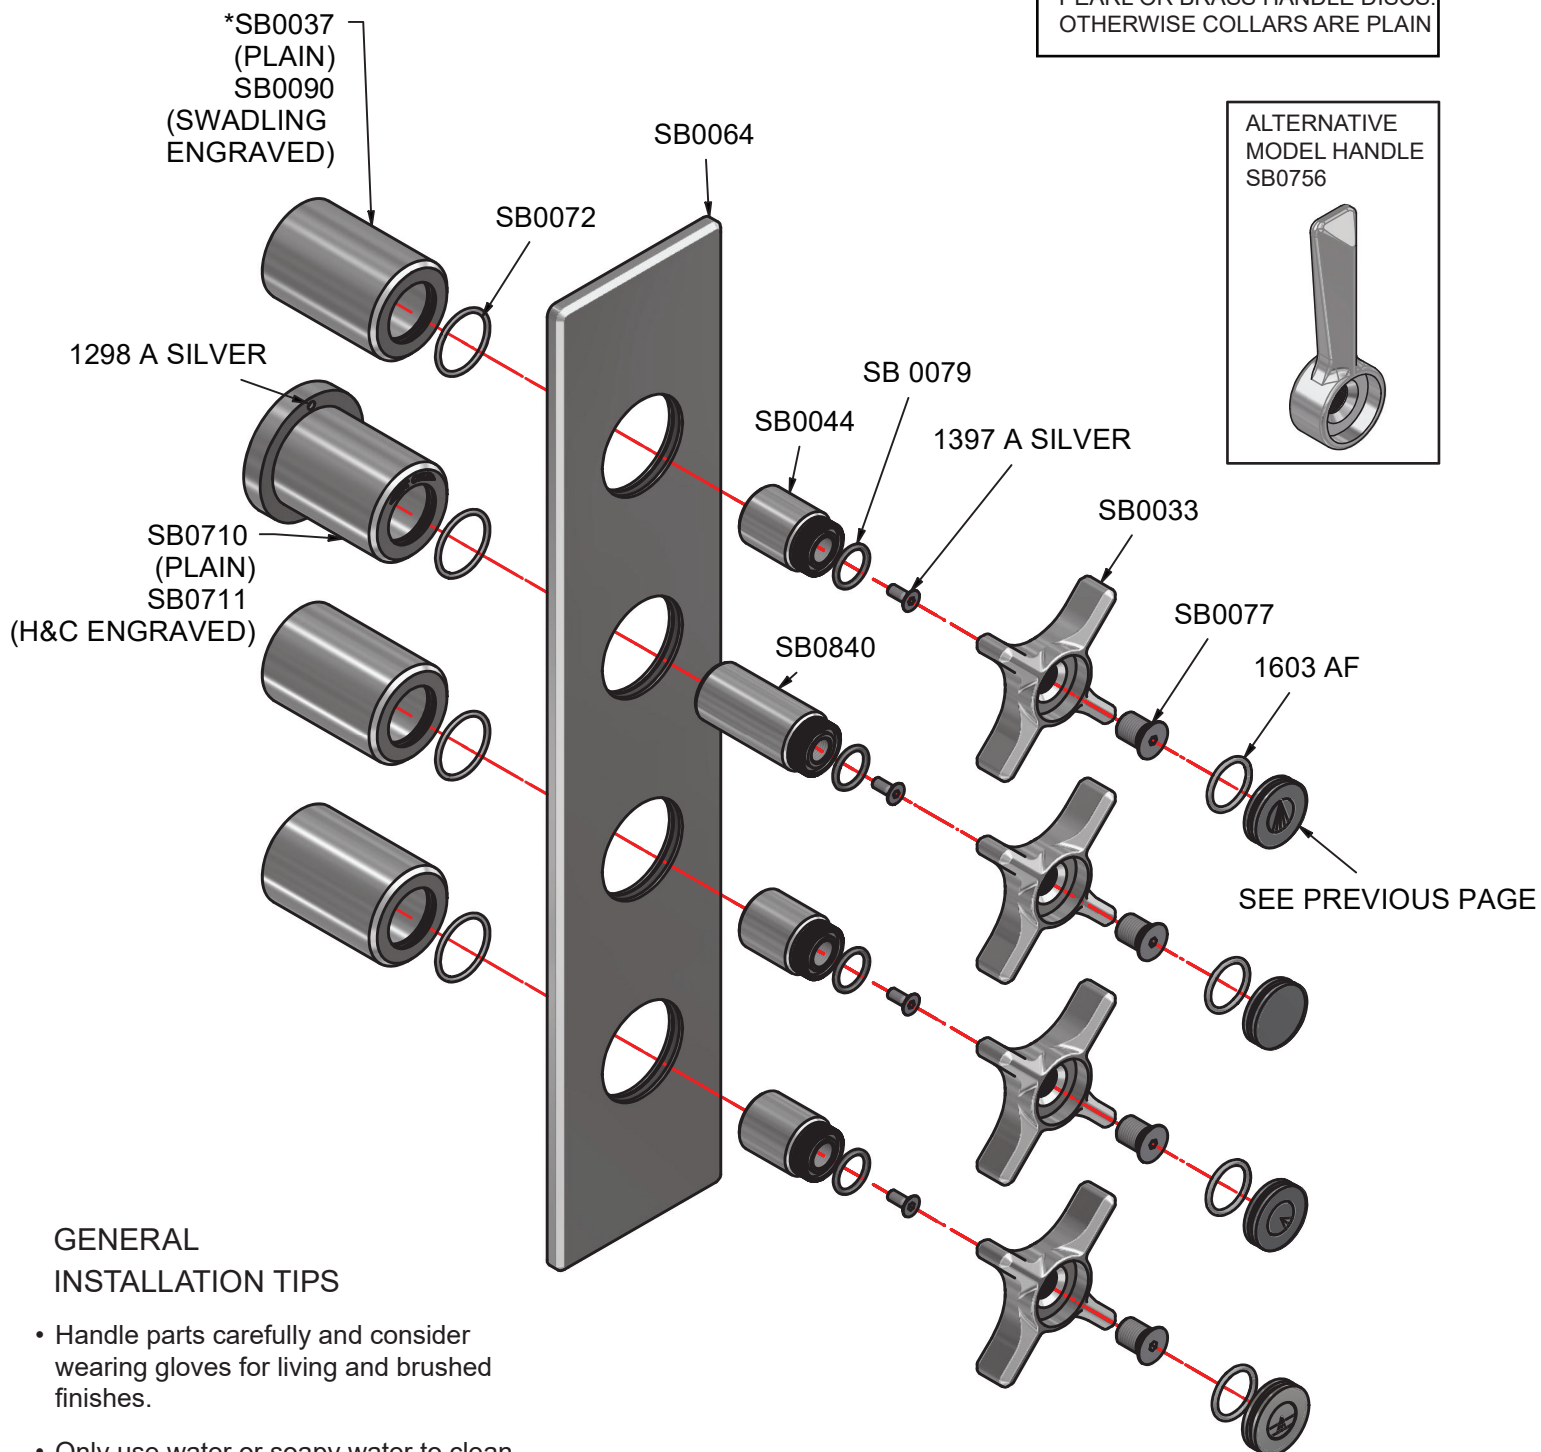

GENERAL INSTALLATION TIPS

- Handle parts carefully and consider wearing gloves for living and brushed finishes.
- Only use water or soapy water to clean visible parts.
- Where silicone is required, only use neutral cure silicone.
- Chemicals should be kept away from this product. Splashes and sometimes vapours from household cleaning fluids, marble sealers and grout haze removers can cause damage.